Product details: Mobile welding fume extractor

ClearStream 2000 3m





product code: SP030-06-203 product ean: 5900391249567

Standard equipment:

- Vortex 200 extraction arm 3m
- ClearStream 2000 mobile air ventilation system



Additional paid options:

- LED lighting in the nozzle
- Automatic operation sensor for welding

processes

- HEPA filter
- EC motor

Order fulfillment time - 4 weeks

Made in EU

Product variants

Index

Mobile welding fume extractor ClearStream 2000 3m

SP030-06-203

Mobile welding fume extractor ClearStream 1000 2m

SP030-06-002

Mobile welding fume extractor ClearStream 1000 3m

SP030-06-003

Mobile welding fume extractor ClearStream 2000 2m

SP030-06-202

Mobile welding fume extractor ClearStream Duo 2000 2m

SP030-06-302

Mobile welding fume extractor ClearStream Duo 2000 3m

SP030-06-303

Product description


Mobile Welding Fume Extractors SPARTUS® ClearStream 2000

ClearStream 2000 is designed for effective filtering of dust generated by activities such as welding, grinding, cutting, and processing of plastics and metals. This model utilizes an advanced, three-stage filtration system. Preliminary cleaning is done using a metal filter that captures larger particles and sparks. Next, the main cartridge filter thoroughly removes

NOV-WELD Generate: 2025-08-11 1/2

minor contaminants. Final cleaning is provided by activated carbon-coated fabric. **ClearStream 2000** is equipped with a manual system for cleaning the main filter using compressed air (it has its own 20-liter tank), which increases its efficiency and extends its lifespan. The device is recommended for applications requiring continuous air quality control.

- **Advanced filtration:** Utilizes a three-stage filtration process, ensuring effective removal of various air contaminants.
- **High performance:** Filtration capacity of 2000 m³/h ensures efficient air cleaning.
- Full mobility: The housing equipped with wheels (including two swivel wheels) ensures easy movement.
- **Easy filter cartridge handling:** The design provides easy access and handling of the filters, facilitating their regular cleaning and maintenance.

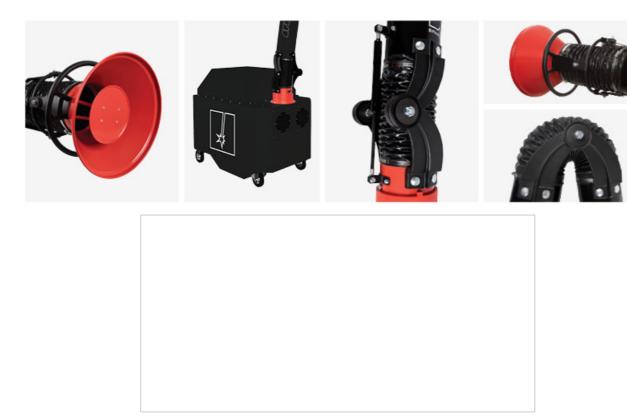

Applications:

- Welding work requiring continuous extraction
- Work at repair stations
- Local ventilation (excluding corrosive and aggressively acting fumes or chemical gases)
- Professional use
- Protecting employees' health and improving working conditions

Technical details

Model	•
Reach	3m
Flow	2000 m³/h
Noise level	75 dB(A)
Power	2,2 kW
Input	~3× 400V ± 10% 50 / 60 Hz

NOV-WELD Generate: 2025-08-11 2 / 2