

Product details: HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=550]

nov-weld

product code: **SP28W-15-10-550M**  
product ean: **5900391004753**



## Product variants

| Index   | Price  |
|---|--|
| <b>HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=550]</b><br>SP28W-15-10-550M | <b>€2,346.03 / pc</b><br>VAT 23%<br>€2,885.62 / pc |
| <b>HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=620]</b><br>SP28W-15-10-620M | <b>€2,346.03 / pc</b><br>VAT 23%<br>€2,885.62 / pc |
| <b>HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=450]</b><br>SP28W-15-10-450M | <b>€2,346.03 / pc</b><br>VAT 23%<br>€2,885.62 / pc |
| <b>HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=350]</b><br>SP28W-15-10-350M | <b>€2,346.03 / pc</b><br>VAT 23%<br>€2,885.62 / pc |
| <b>HERMES 3D 1500 x 1000 x 200 [4 table legs with wheels L=200]</b><br>SP28W-15-10-200M | <b>€2,346.03 / pc</b><br>VAT 23%<br>€2,885.62 / pc |

## Product description

### RELY ON COMFORT DURING WELDING, BY USING THE HERMES TABLES!

- **S355J2+N STEEL**

Welding table top is made of S355J2+N steel grade, which is characterized by high strength and resistance to impact and deformation, and also provides protection against corrosion and weld spatter.

- **25mm TABLE TOP**

The table top with a thickness of 25 mm guarantees the durability of the table and resistance to mechanical damage.


- **MILLIMETRIC SCALE**

The applied millimeter scale facilitates precise assembly of the element to be processed.

- **3D SIDE**

It allows to expand the working surface and joining the table tops.

- **D28 SYSTEM**

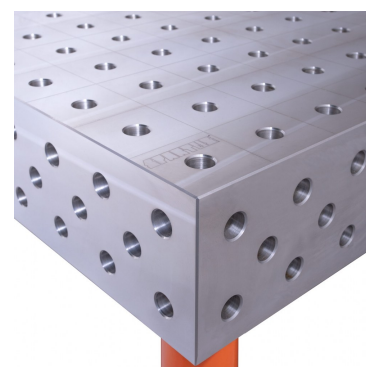

Drilled and chamfered holes 28mm.

## Technical details

|                                   |   |
|-----------------------------------|---|
| <b>Size of the work surface</b>   | <b>1500 x 1000 x 200mm</b>                          |
| <b>Made</b>                       | <b>welded</b>                                       |
| <b>Material</b>                   | <b>S355J2+N steel acc. to EN 10025-2</b>            |
| <b>Table top thickness</b>        | <b>25mm</b>   |
| <b>Table horizontal precision</b> | <b>0.1/1000mm</b>                                   |
| <b>Table vertical precision</b>   | <b>0.1/200mm</b>                                    |
| <b>Standard</b>                   | <b>D28 (drilled and milled holes 28mm diameter)</b> |
| <b>Carrying capacity</b>          | <b>2000kg/leg</b>                                   |
| <b>Type of leg</b>                | <b>with a wheel</b>                                 |
| <b>Leg length</b>                 | <b>550mm</b>  |
| <b>Number of legs</b>             | <b>4pcs.</b>  |
| <b>Total table height</b>         | <b>870mm</b>  |
| <b>Table top weight</b>           | <b>535kg</b>  |