
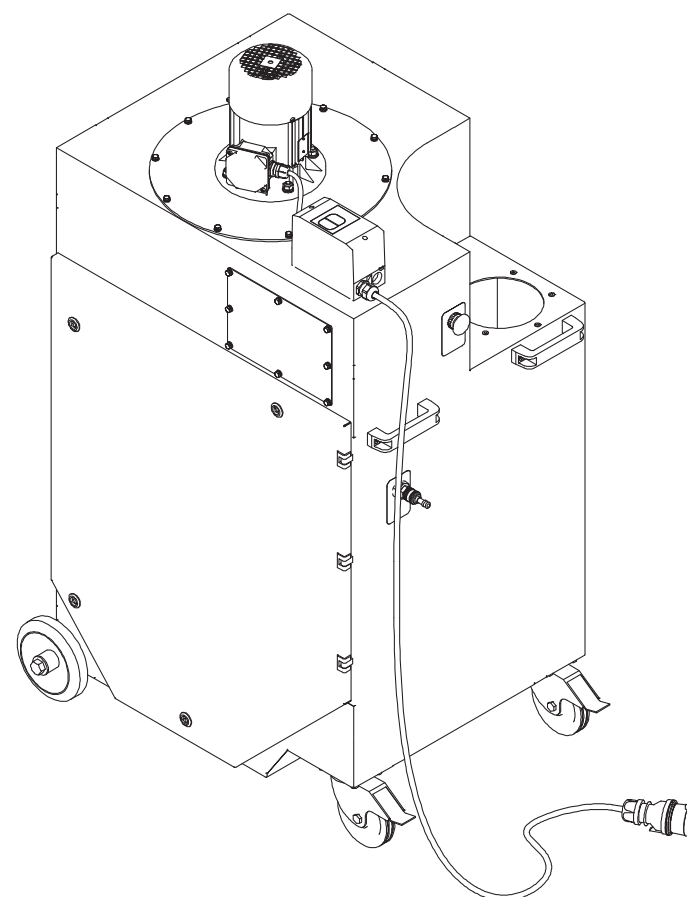
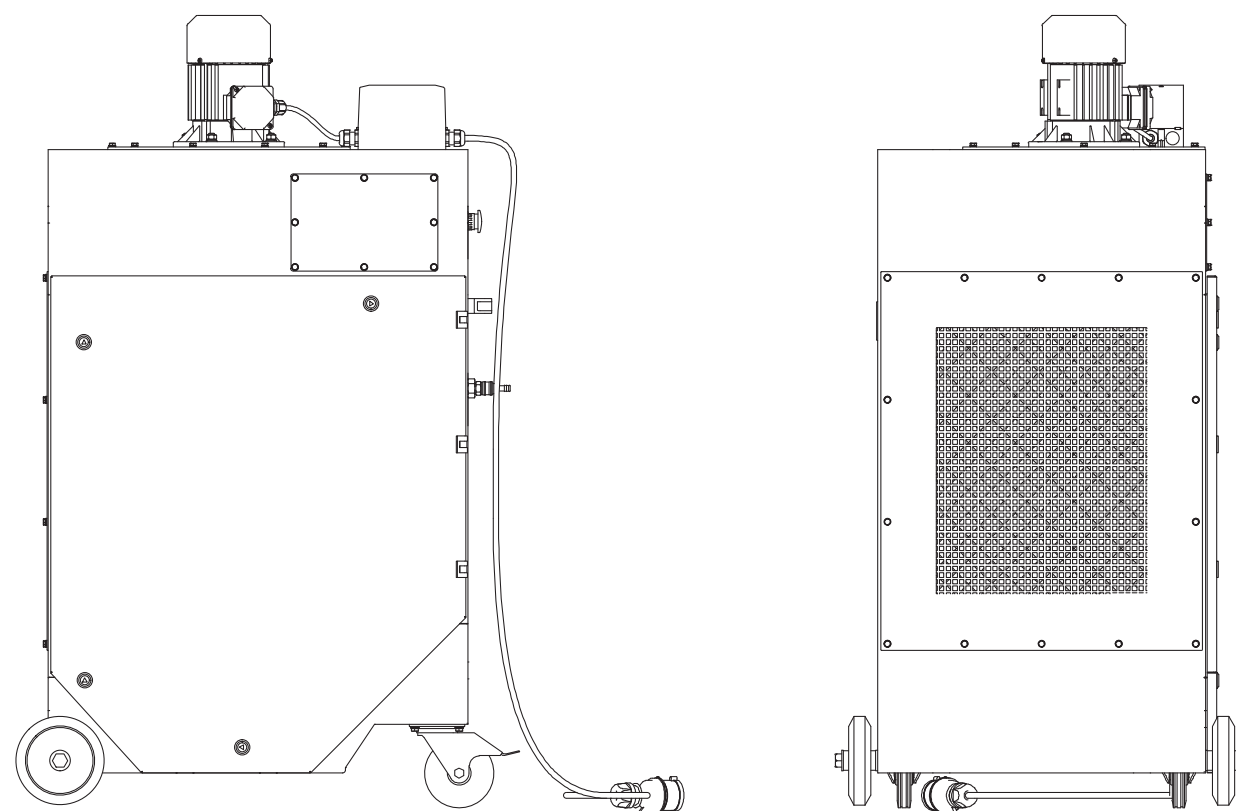
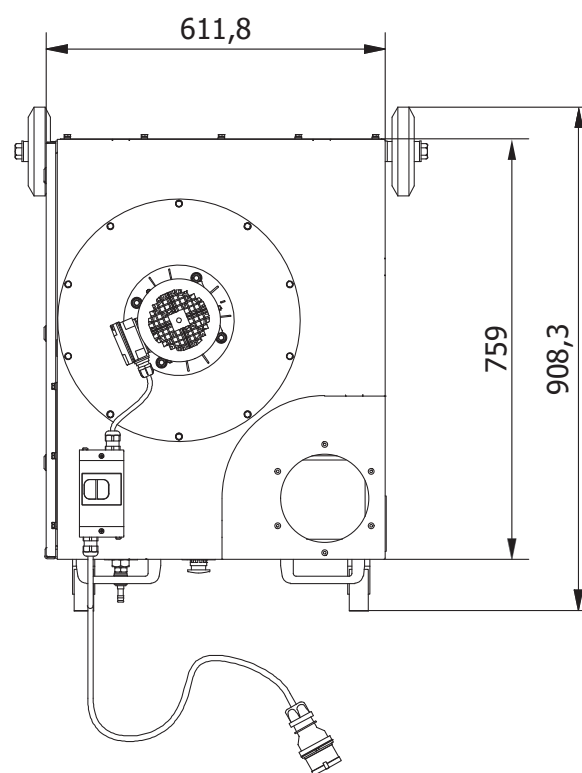


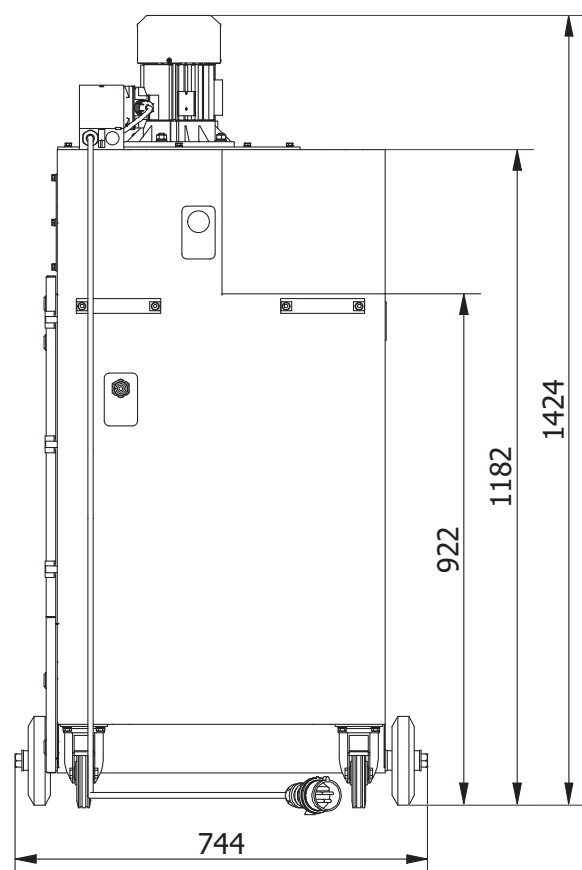

• spartus.info

ClearStream 1000 - mobile welding fume extractor

SP030-06-237 • Filtration surface area: 18.3 m²
• Fan: 1.1 kW – 1 phase, 400 V

Single-station mobile welding fume extractor designed for filtering dry dust in air ventilation systems.

Standard construction:

- 1.1 kW radial fan
- three-stage filtration
- manual regeneration system for the main filter
- steel, welded housing with powder coating
- two dust drawers

Specifications:

Nominal air flow: 1000 m³/h
Filtration surface area: 18,3 m²
Weight: 125 kg
Power supply: 3 x 400V / 50Hz
Motor power: 1,1 kW
Rated current: 2,7 A


Accessories and options:

- Vortex 160 extraction arm, reach 2 m, nozzle inlet Ø315 mm
- Vortex 160 extraction arm, reach 3 m, nozzle inlet Ø315 mm
- main filter regeneration system with timer control
- 10 l compressed air tank

Spare parts:

- cartridge filter 18.3 m²
- cartridge filter 12 m²
- outlet filter (nonwoven fabric impregnated with activated carbon)
- metal pre-filter

Packing method and carton dimensions:



A = 780
B = 745
H = 1440
weight = 125 kg

All dimensions are given in mm

NOV-WELD Sp. z o.o.
Miszewko, Słoneczna 9, 80-297 Banino
Phone: +48 58 341 3417, Fax: +48 58 345 7946
Email: nowweld@nowweld.pl



All rights reserved. This document and the designs, technical data, and trademarks it contains are protected and remain the property of the manufacturer. The manufacturer reserves the right to introduce design changes without prior notice.